


Fender Splash Shield - Dark Horse/GT


Removal

NOTE: LH side shown, RH side similar.


1. Remove the wheel and tire.
Refer to: [Wheel and Tire](#) (204-04A Wheels and Tires, Removal and Installation).
2. Remove the push pins.

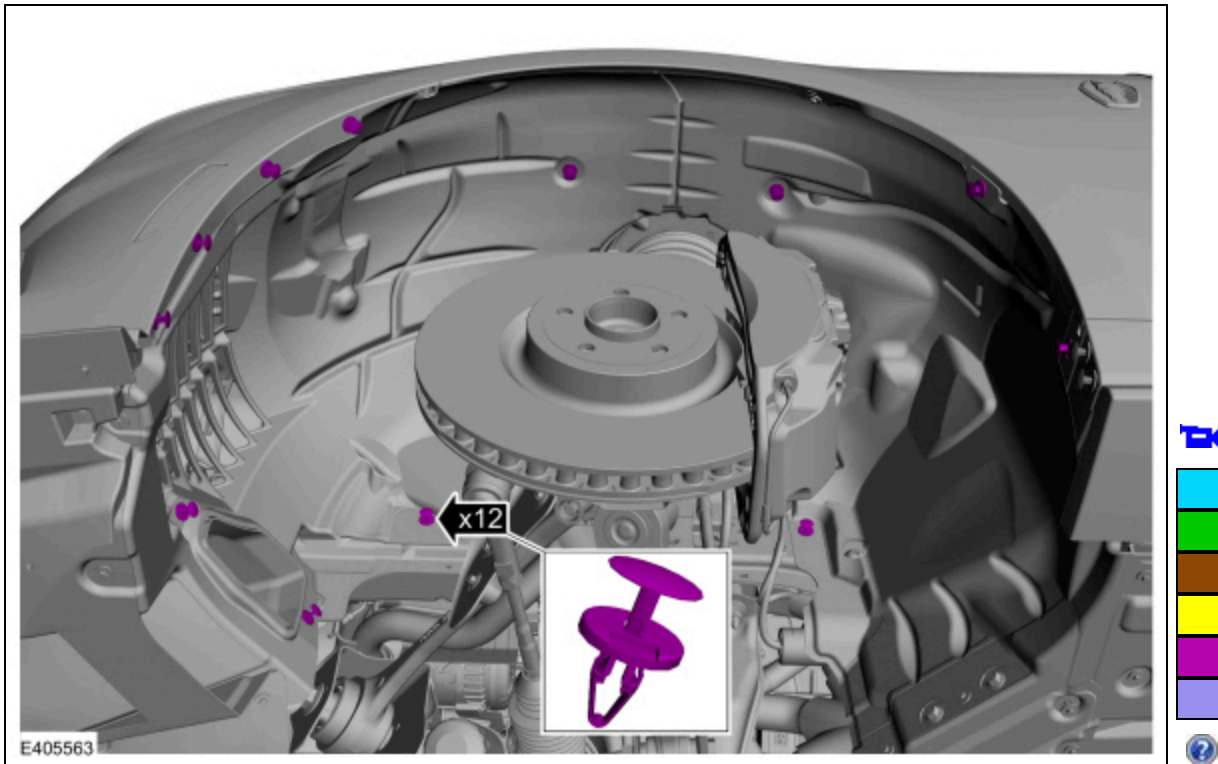


3. Remove the push pins.

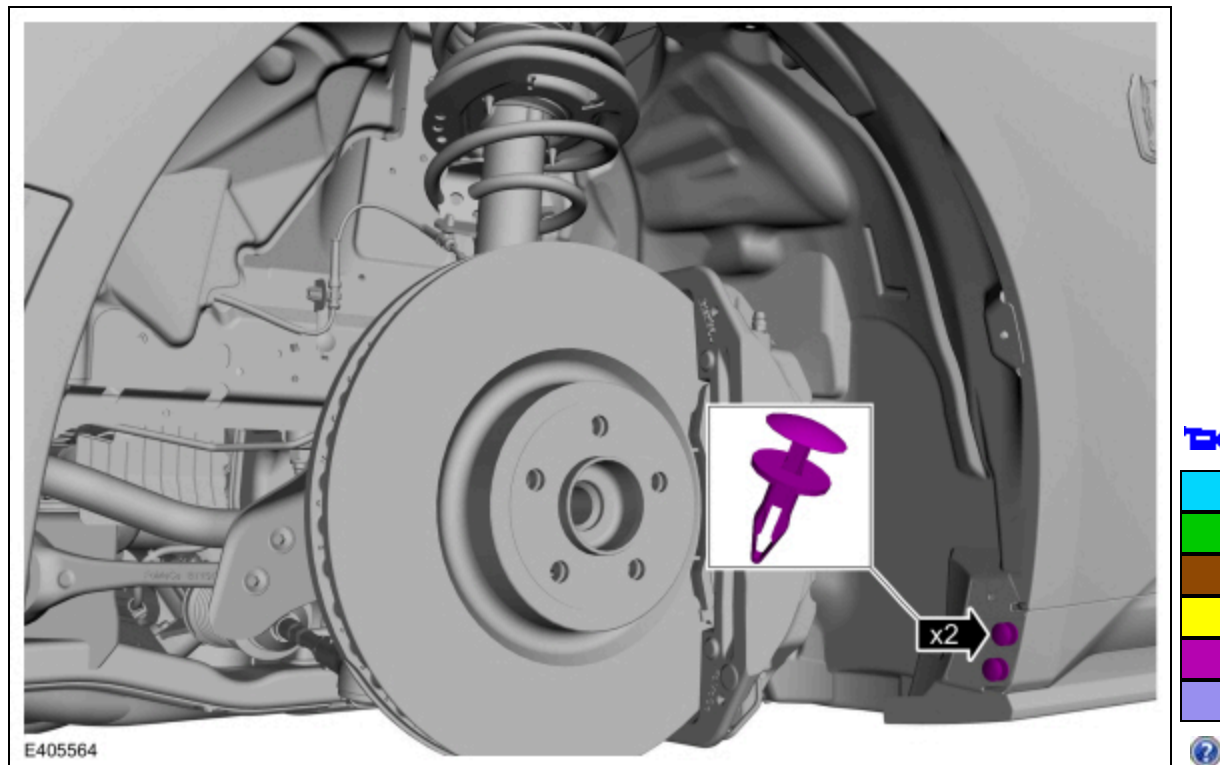

4. Remove the bolts.
Torque: 18 lb.in (2 Nm)

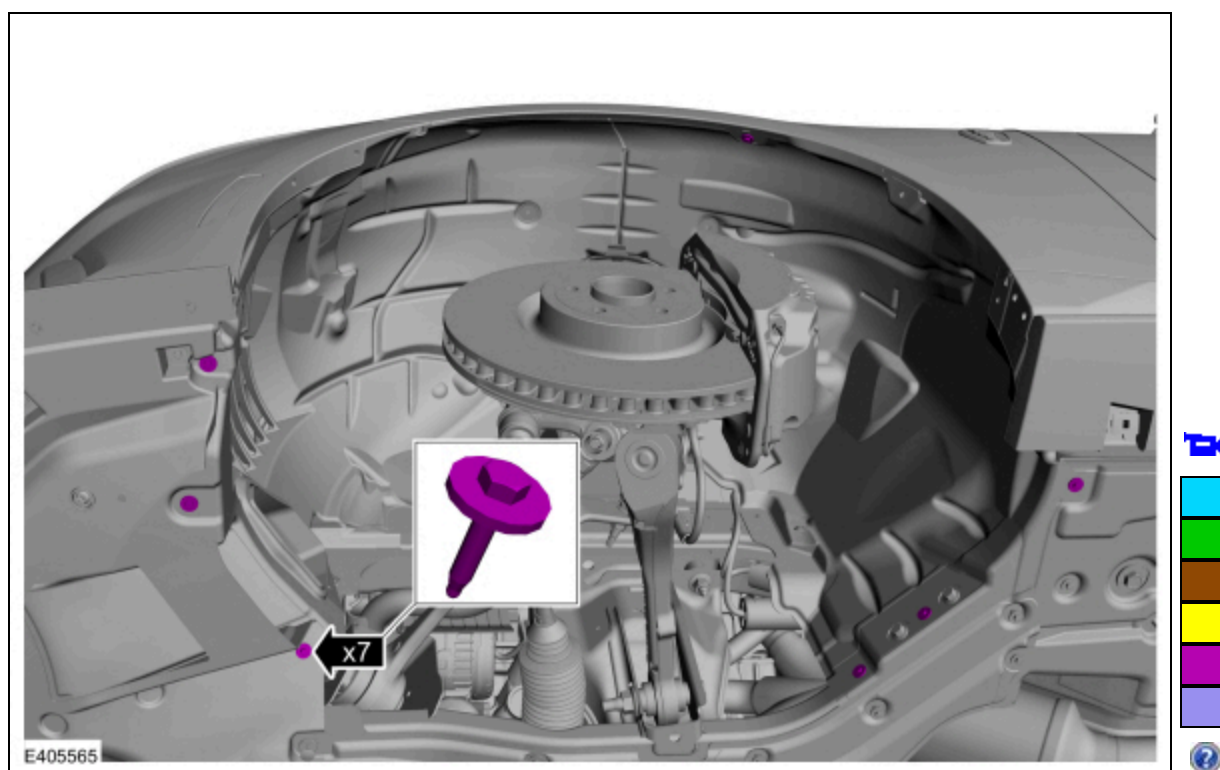

5. Remove the fender splash shield.

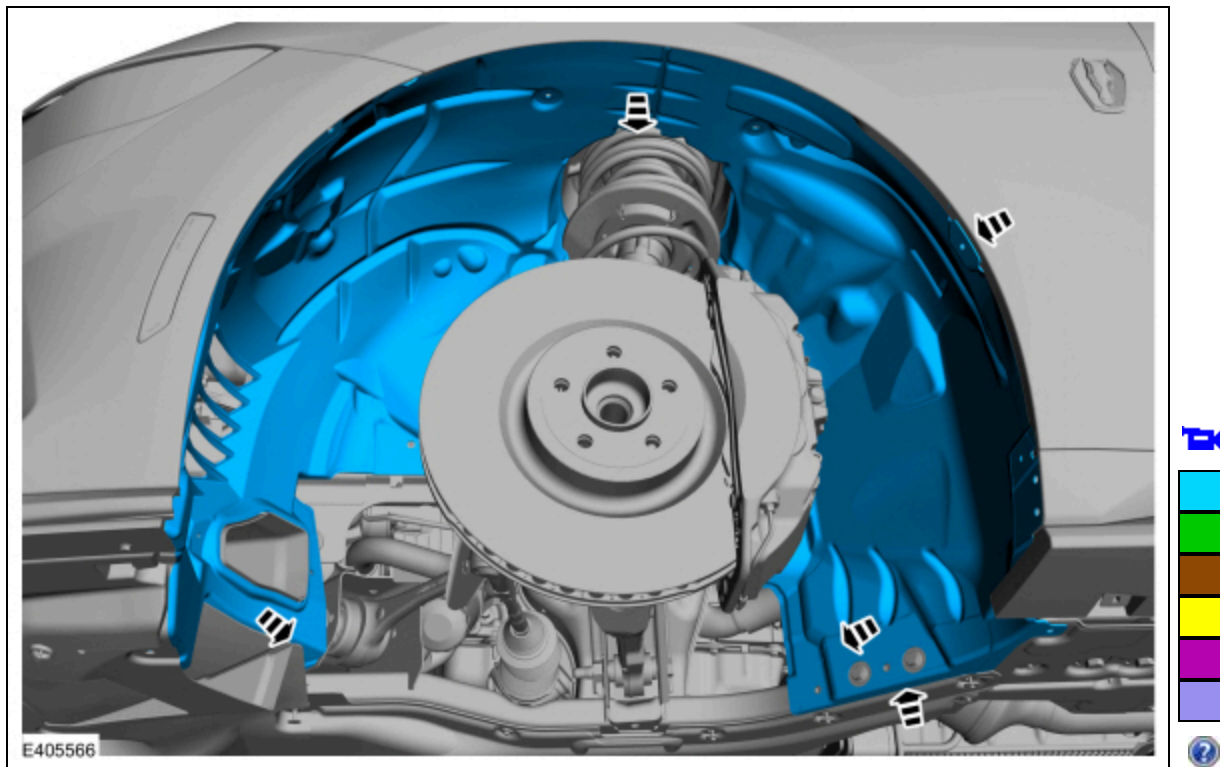

Installation

- 1. To install, reverse the removal procedure.